TUDOR STREET EC4

- Building designed to incorporate pre-cast units on main elevations with in-situ brickwork corners.
- Brick joints pre-pointed in moulds to method developed by Ibstock.
- Window units glazed off-site.
- Pre-glazed units delivered and fixed without breakage.
- High repetition lead to reduced factory costs.
- Mullions, pilasters, band course and window units all pre-assembled.

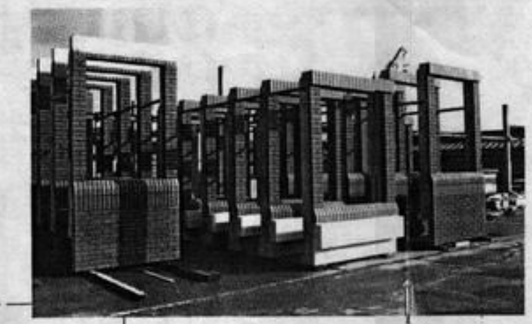

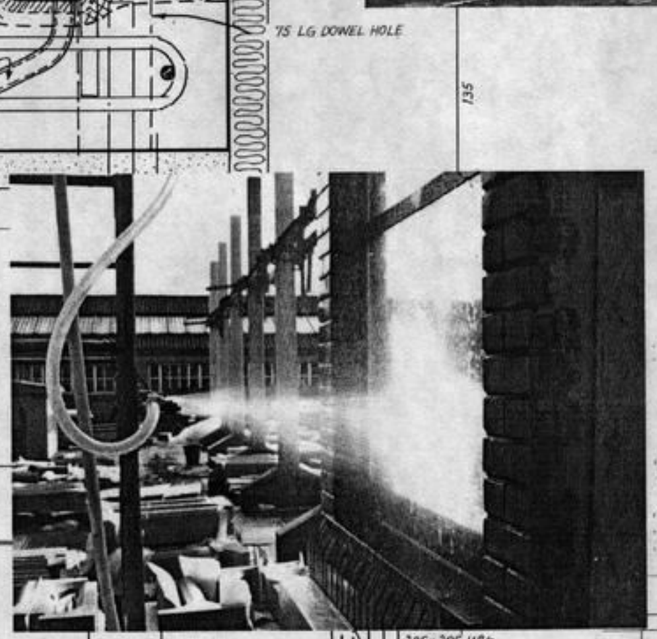

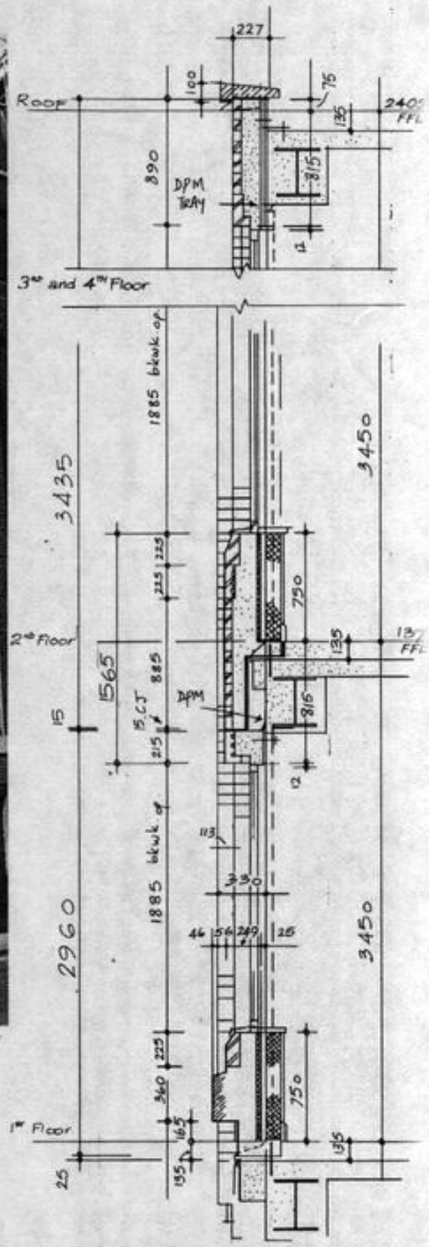

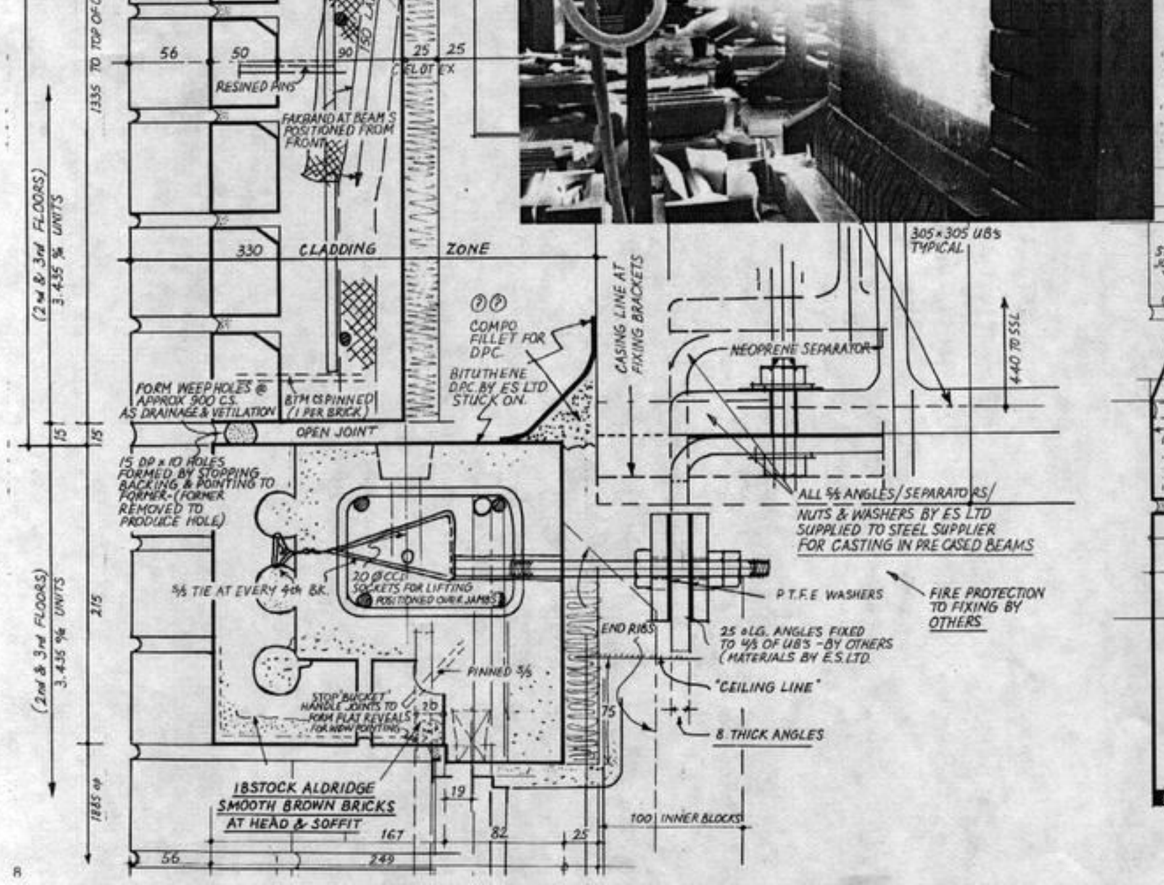

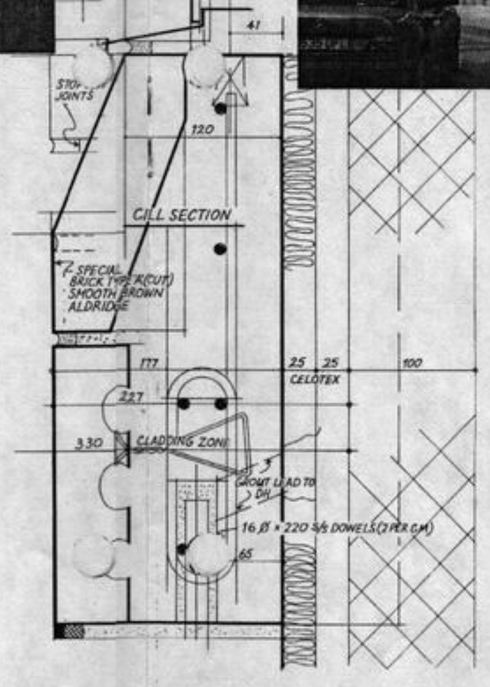

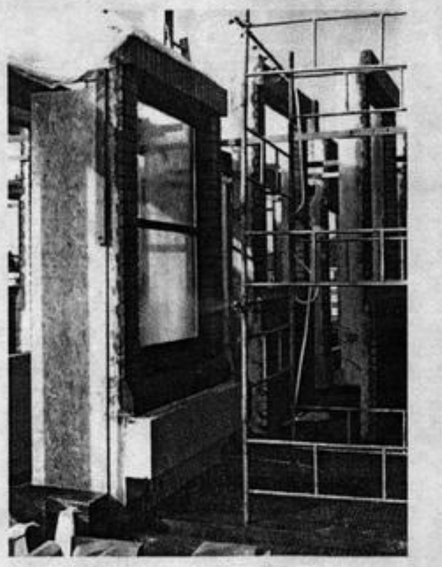

Contract
20-22 TUDOR STREET LONDON EC4

Architect
TREHEARNE & NORMAN, LONDON

Engineer
GRIFFITHS CLEATOR & ASSOCIATES, LONDON

Pre-caster
EMPIRE STONE LIMITED, LEICESTER

Main Contractor
HILSTONE CONSTRUCTION LIMITED, LONDON

BRICK TYPES
Leicester Multi Red Stock
Aldridge Smooth Brown